
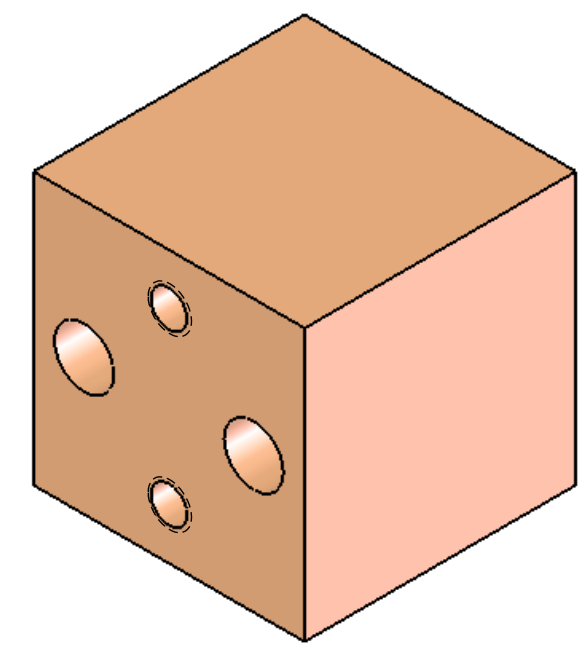


REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	APPROVED
0		Initial Release.	8/31/2004	

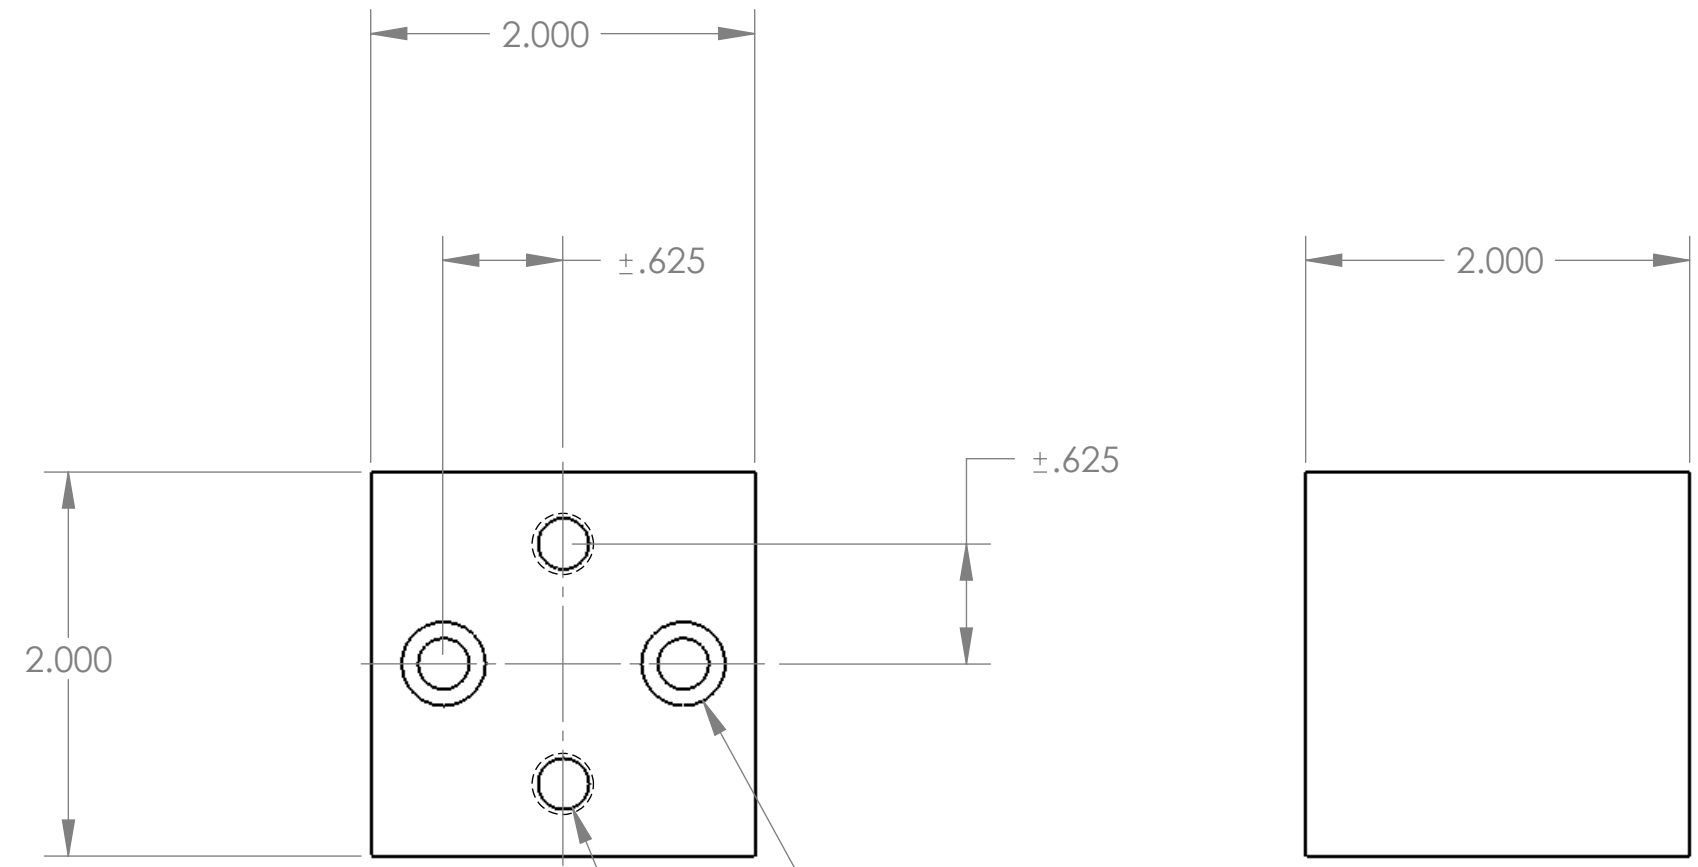

2X  $\phi$  .266 THRU ALL  
 $\square$   $\phi$  .438  $\nabla$  1.000

2X  $\phi$  .266  $\nabla$  .941  
 TAP FOR 1/4-20 HELICOIL INSERT = 2.0 \* DIA.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES, REMOVE BURRS AND BREAK SHARP EDGES 0.005-0.010

TOLERANCES: .XX $\pm$ .010 .XXX $\pm$ .005  
 ANGLES  $\pm$ 0.5° UNLESS NOTED,  
 ALL SURFACES 64 UNLESS NOTED

MATERIAL: 6061-T6 AL  
 QNTY: 4

		<b>TRIPLESPEC</b>		Cornell University Center for Radiophysics and Space Research - Ithaca, NY 14853	
NAME:	INIT.	DATE:	TITLE:	Spacer Block	
DRAWN:	CH		SIZE:	B	REV 0
CHECKED:			DRAWING #	TRDMO002	
APPROVED:			SCALE: 1:1	DATE: 1/21/2008	SHEET 1 OF 1
FABRICATED:			FILE: TRDMO002 TRDMO002 Spacer Block		